
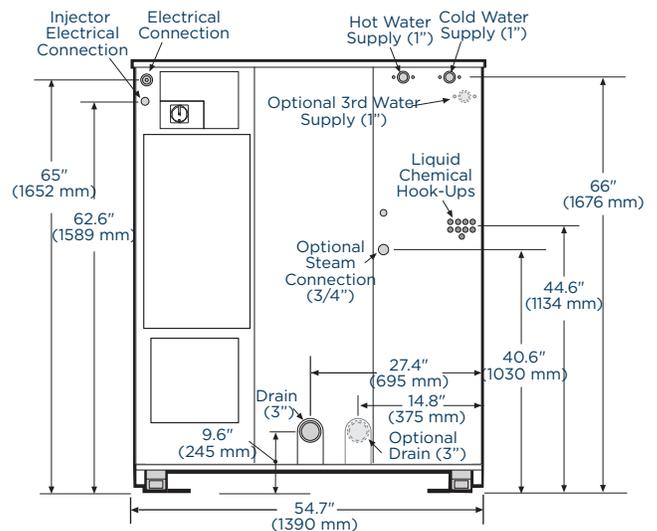
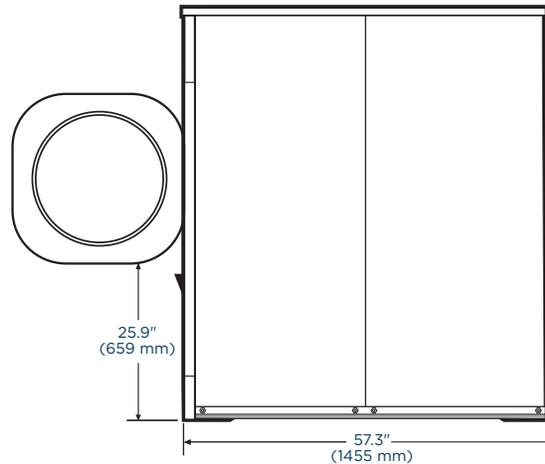


EH090

ON-PREMISE E-SERIES SOFT-MOUNT WASHER-EXTRACTOR

ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

Capacity <i>lbs</i>	90
Cylinder Diameter <i>inch</i>	35.4
Cylinder Depth <i>inch</i>	24.4
Cylinder Volume <i>cu ft</i>	13.9
Net Weight <i>lbs</i>	3106
Crated Weight <i>lbs</i>	3405
Machine Dimensions <i>inch</i> WxDxH	54.7 x 57.3 x 70.8
Door Opening <i>inch</i>	22
Floor to Door <i>inch</i>	25.9
Shipping Dimensions <i>inch</i> WxDxH	59.8 x 62.2 x 79.9
Washing Speeds <i>rpm</i>	19/26/33/40
Spin Speeds <i>rpm</i>	40/79/325/490/680/870
G-force	0.8/3.1/53/121/233/381
Static Force Transmitted <i>lbs</i>	3547
Dynamic Force Transmitted <i>lbs</i>	556
Frequency of Dynamic Force <i>Hz</i>	14.5
Available Voltages / Wire Conductor / Amp	
Hot Water (standard)	208-240/60/3, 3W+G, 15
Hot Water (standard)	440-480/60/3, 3W+G, 10
Electric Auxiliary Heat (optional)	208/60/3, 3W+G, 80
Electric Auxiliary Heat (optional)	240/60/3, 3W+G, 80
Steam Auxiliary Heat (optional)	208-240/60/3, 3W+G, 15
Steam Auxiliary Heat (optional)	440-480/60/3, 3W+G, 10
Drain Diameter <i>inch</i>	3
Water Inlets <i>inch</i>	2 @ 1
Recommended Water Pressure <i>PSI</i>	30-60
Water Flow <i>gal/min</i>	26
Steam Connection <i>inch</i>	3/4
Steam Pressure (optional) <i>PSI</i>	29-87
Steam Flow (optional) <i>lbs/h</i>	397
Total Power <i>kW</i>	4.8
Electrical Heating Power (optional) <i>kW</i>	
208/60/3	18.6
240/60/3	24.2

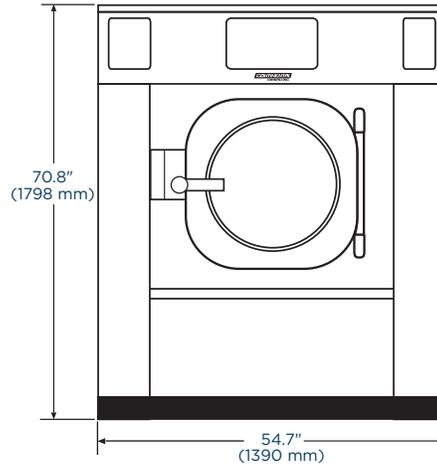

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for dimensions not shown or for clarification.

continental-laundry.com • (800) 256-1073 • 2500 State Road 44 • Oshkosh, WI 54904



GIRBAU COMMERCIAL
LAUNDRY PRODUCTS
provided exclusively by
Continental
LAUNDRY SOLUTIONS