


# EH130 Tilt

## ON-PREMISE E-SERIES SOFT-MOUNT WASHER-EXTRACTOR

ARCHITECTURAL/MECHANICAL  
PRODUCT SPECIFICATIONS

Capacity <i>lbs</i>	130
Cylinder Diameter <i>inch</i>	42.5
Cylinder Depth <i>inch</i>	24.4
Cylinder Volume <i>cu ft</i>	20.1
Net Weight <i>lbs</i>	4965
Crated Weight <i>lbs</i>	5549
Crated Weight-Tilt Assembly <i>lbs</i>	913
Machine Dimensions <i>inch</i> WxDxH	65 x 63.5 x 83.3
Door Opening <i>inch</i>	22
Floor to Door <i>inch</i>	39.4
Shipping Dimensions <i>inch</i> WxDxH	66.5 x 64.8 x 85
Shipping Dimensions-Tilt Assembly WxDxH <i>inch</i>	42.5 x 78 x 27.6
Washing Speeds <i>rpm</i>	13/18/24/30/36
Spin Speeds <i>rpm</i>	72/300/450/625/800
G-force	3.13/54/122/236/387
Static Force Transmitted <i>lbs</i>	5594
Dynamic Force Transmitted <i>lbs</i>	692
Frequency of Dynamic Force <i>Hz</i>	13.3
Available Voltages / Wire Conductor / Amp	
Hot Water (standard)	208-240/60/3, 3W+G, 25
Hot Water (standard)	440-480/60/3, 3W+G, 15
Electric Auxiliary Heat (optional)	208/60/3, 3W+G, 100
Electric Auxiliary Heat (optional)	240/60/3, 3W+G, 125
Steam Auxiliary Heat (optional)	208-240/60/3, 3W+G, 25
Steam Auxiliary Heat (optional)	440-480/60/3, 3W+G, 15
Drain Diameter <i>inch</i>	3
Water Inlets <i>inch</i>	2 @ 1
Recommended Water Pressure <i>PSI</i>	30-60
Water Flow <i>gal/min</i>	26
Steam Connection <i>inch</i>	3/4
Steam Pressure (optional) <i>PSI</i>	29-87
Steam Flow (optional) <i>lbs/h</i>	397
Total Power <i>kW</i>	7.3
Electrical Heating Power (optional) <i>kW</i> 208/60/3	27.6
240/60/3	35.8
Compressed Air Connection <i>inch</i>	3/8
Compressed Air Pressure <i>PSI</i>	87-100
Compressed Air Flow <i>cfm</i>	7

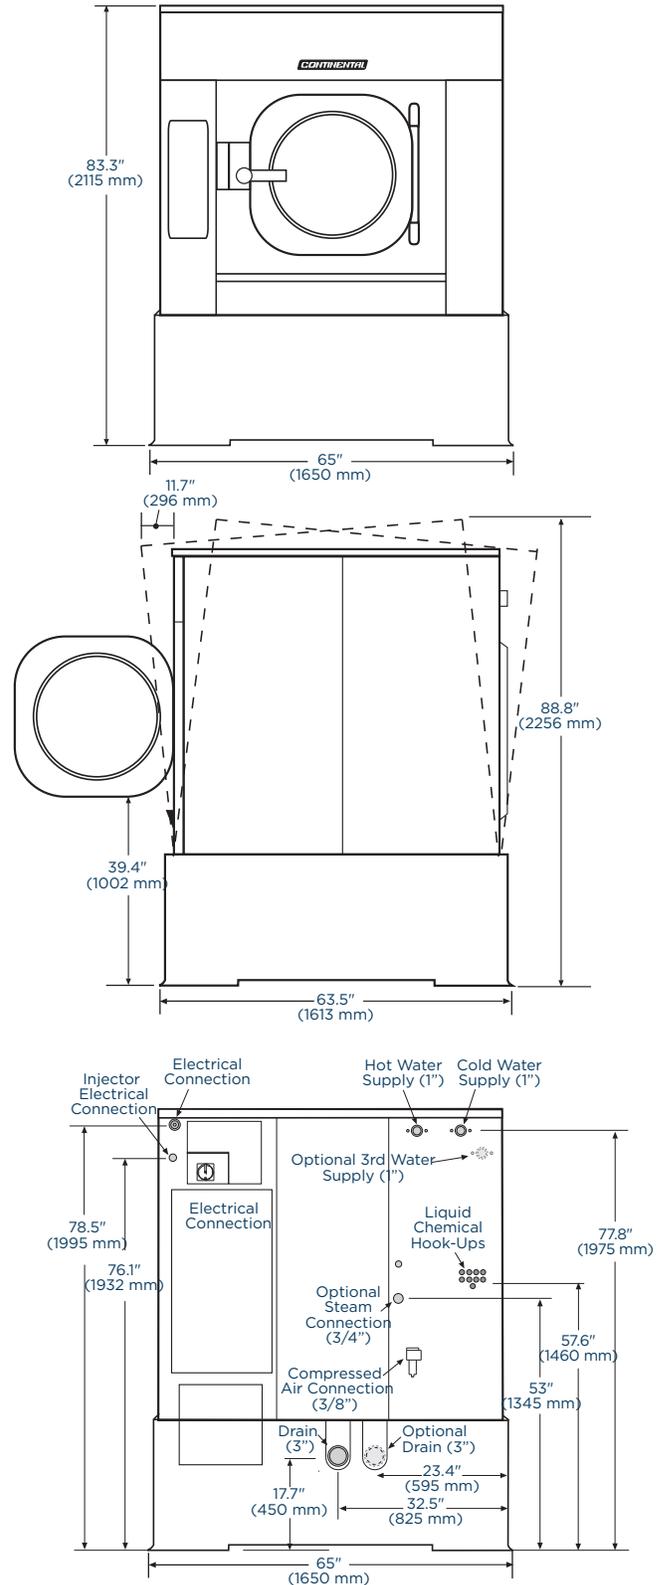

Specifications subject to change without notice or obligation.  
Contact Continental Laundry Solutions at (800) 256-1073 for dimensions not shown or for clarification.

continental-laundry.com • (800) 256-1073 • 2500 State Road 44 • Oshkosh, WI 54904



GIRBAU COMMERCIAL  
LAUNDRY PRODUCTS  
provided exclusively by  
**Continental**  
LAUNDRY SOLUTIONS