
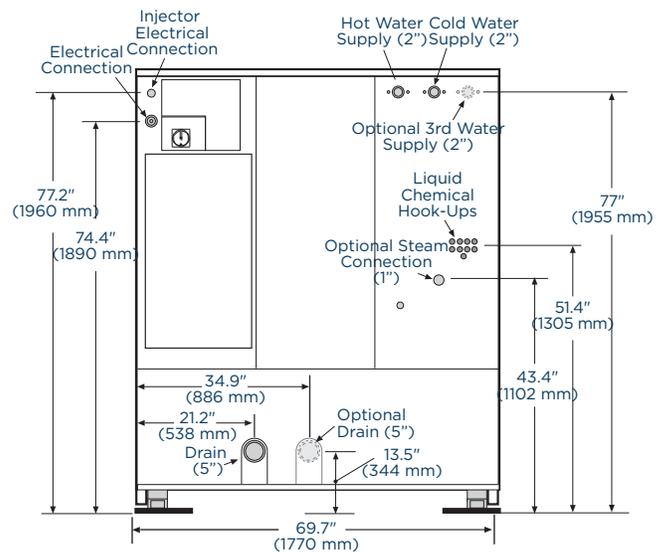
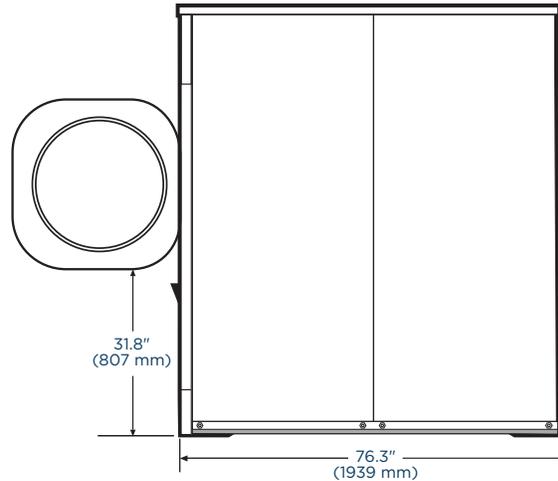


EH255 Stat

ON-PREMISE E-SERIES SOFT-MOUNT WASHER-EXTRACTOR

ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

| | |
|---|------------------------|
| Capacity <i>lbs</i> | 255 |
| Cylinder Diameter <i>inch</i> | 51.6 |
| Cylinder Depth <i>inch</i> | 32.1 |
| Cylinder Volume <i>cu ft</i> | 38.8 |
| Net Weight <i>lbs</i> | 8566 |
| Crated Weight <i>lbs</i> | 9056 |
| Machine Dimensions <i>inch</i> WxDxH | 69.7 x 76.3 x 81.4 |
| Door Opening <i>inch</i> | 26.9 |
| Floor to Door <i>inch</i> | 31.8 |
| Shipping Dimensions <i>inch</i> WxDxH | 76.8 x 83.5 x 88.4 |
| Washing Speeds <i>rpm</i> | 13/17/22/27/32 |
| Spin Speeds <i>rpm</i> | 66/250/405/565/725 |
| G-force | 3.2/46/120/234/385 |
| Static Force Transmitted <i>lbs</i> | 9778 |
| Dynamic Force Transmitted <i>lbs</i> | 1482 |
| Frequency of Dynamic Force <i>Hz</i> | 12.1 |
| Available Voltages / Wire Conductor / Amp | |
| Hot Water (standard) | 208-240/60/3, 3W+G, 40 |
| Hot Water (standard) | 440-480/60/3, 3W+G, 20 |
| Steam Auxiliary Heat (optional) | 208-240/60/3, 3W+G, 40 |
| Steam Auxiliary Heat (optional) | 440-480/60/3, 3W+G, 20 |
| Drain Diameter <i>inch</i> | 5 |
| Water Inlets <i>inch</i> | 2 @ 2 |
| Recommended Water Pressure <i>PSI</i> | 30-60 |
| Water Flow <i>gal/min</i> | 58 |
| Steam Connection <i>inch</i> | 1 |
| Steam Pressure (optional) <i>PSI</i> | 29-87 |
| Steam Flow (optional) <i>lbs/h</i> | 794 |
| Total Power <i>kW</i> | 11 |
| Compressed Air Connection <i>inch</i> | 3/8 |
| Compressed Air Pressure <i>PSI</i> | 87-100 |
| Compressed Air Flow <i>cfm</i> | 10 |

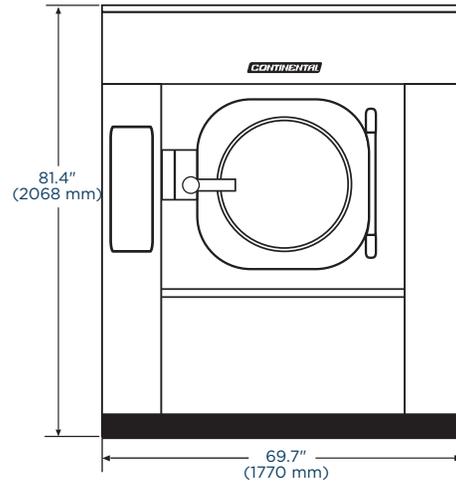

Specifications subject to change without notice or obligation.
Contact Continental Laundry Solutions at (800) 256-1073 for
dimensions not shown or for clarification.

continental-laundry.com • (800) 256-1073 • 2500 State Road 44 • Oshkosh, WI 54904



GIRBAU COMMERCIAL
LAUNDRY PRODUCTS
provided exclusively by
Continental
LAUNDRY SOLUTIONS